

Retro-Reflex Sensors

for Clear Glass Recognition


LD86PCV3

Part Number




- Stainless Steel Housing
- Switching Distance Adjuster

A reflector must be used in combination with these sensors. wenglor has the right retro-reflex light barrier for every application. Even crystal-clear objects and sheet products can be reliably recognized.

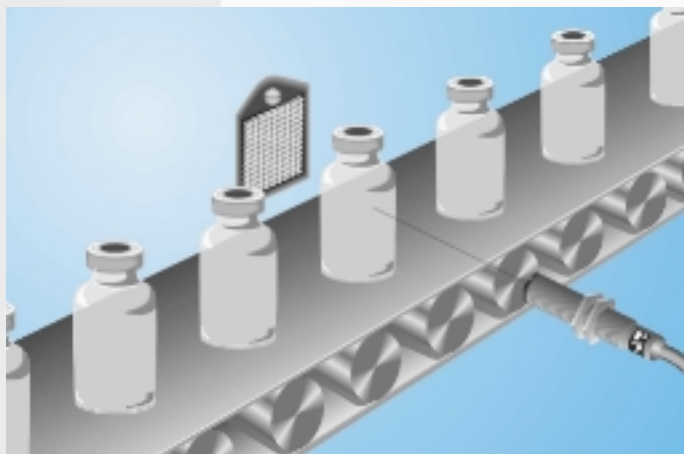

Technical Data


Optical Data	
Range	6000 mm
Reference Reflector	RQ100BA
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25°C)	100000 h
max. Ambient Light	10000 Lux
Opening Angle	5 °
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24V)	< 40 mA
Switching Frequency	1 kHz
Response Time	500 μs
Temperature Drift	< 10 %
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Adjustment	Potentiometer
Housing	Stainless Steel
Full Encapsulation	yes
Protection Mode	IP 67
Connection	M 12x1
Protective Insulation, Rated Voltage	50 V

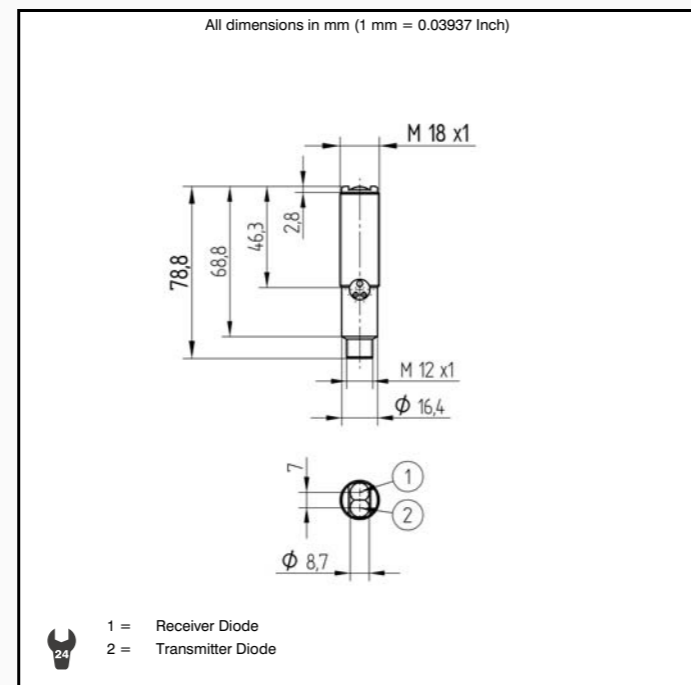

Specifications are subject to change without notice
38/03



Plug Version	
Part Number	LD86PCV3
Contamination Output	●
PNP NO/NC switchable	●
Connection Diagram No.	105
Control Panel No.	D 5
Suitable Plug No.	1

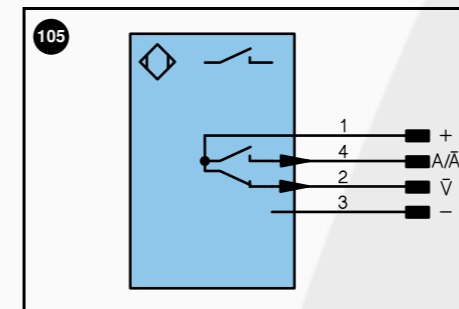


Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
~	Power supply (AC Voltage)	RD red
A	Switching output (1,2,3...)/ NO	OG orange
Ā	Switching output (1,2,3...)/ NC	YE yellow
V	Contamination / Error output (NO)	GN green
∇	Contamination / Error output (NC)	BU blue
E	Input (analog or digital)	VT violet
T	Teach input	GY grey
Z	Time delay (activation)	WH white
S	Shielding	PK pink
RxD	RS-232 receive path	GNYE green yellow
TxD	RS-232 send path	
U	Test input	
W	Trigger input	
O	Analog output (1,2,3,...)	
O-	Ground for the analog output	
BZ	Block discharge	
Aw	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
SY	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	

Accessories

- Mounting Clamp BSM18B
- Mounting Bracket W18
- Reflector, Reflector Tape

Ctrl. Panel



- 01 = Switching Status Indicator
- 02 = Contamination Warning
- 05 = Switching Distance Adjuster
- 08 = NO/NC Switch