

Reflex Sensor with Background Suppression

HK12PB8

Part Number



- Electronic background suppression
- Miniature design
- Red light
- Switching distance adjuster

Technical Data


Optical Data	
Range	120 mm
Adjustable Range	18...120 mm
Switching Hysteresis	< 10 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1



Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 25 mA
Switching Frequency	1300 Hz
Response Time	385 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data	
Adjustment	Potentiometer
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M8 × 1; 3-pin

PNP NO	●
Connection Diagram No.	102
Control Panel No.	K4
Suitable Connection Technology No.	8
Suitable Mounting Technology No.	400

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

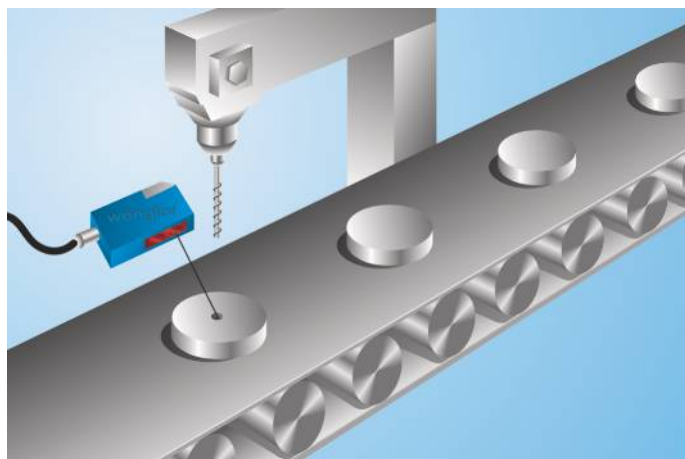

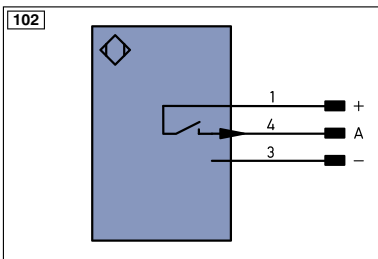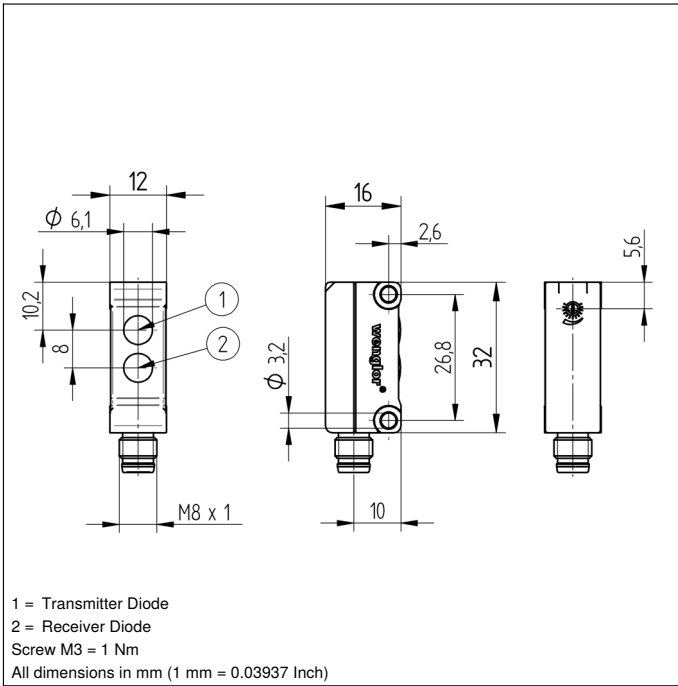


Legend		
+	Supply Voltage +	nc not connected
-	Supply Voltage 0 V	U Test Input
~	Supply Voltage (AC Voltage)	Ū Test Input inverted
A	Switching Output (NO)	W Trigger Input
Ā	Switching Output (NC)	O Analog Output
V	Contamination/Error Output (NO)	O- Ground for the Analog Output
Ṽ	Contamination/Error Output (NC)	BZ Block Discharge
E	Input (analog or digital)	AWV Valve Output
T	Teach Input	a Valve Control Output +
Z	Time Delay (activation)	b Valve Control Output 0 V
S	Shielding	SY Synchronization
RxD	Interface Receive Path	E+ Receiver-Line
TxD	Interface Send Path	S+ Emitter-Line
RDY	Ready	± Grounding
GND	Ground	S _n R Switching Distance Reduction
CL	Clock	Rx+/- Ethernet Receive Path
E/A	Output/Input programmable	Tx+/- Ethernet Send Path
	IO-Link	Bus Interfaces-Bus A(+)/B(-)
PoE	Power over Ethernet	La Emitted Light disengageable
IN	Safety Input	Mag Magnet activation
OSSD	Safety Output	RES Input confirmation
Signal	Signal Output	EDM Contactor Monitoring

Wire Colors according to DIN IEC 757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green Yellow

Table 1


Detection Range	30 mm	75 mm	120 mm
Light Spot Diameter	4 mm	6 mm	10 mm

Ctrl. Panel


05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning

Switching Distance Deviation

Typical characteristic curve based on Kodak white (90 % remission)

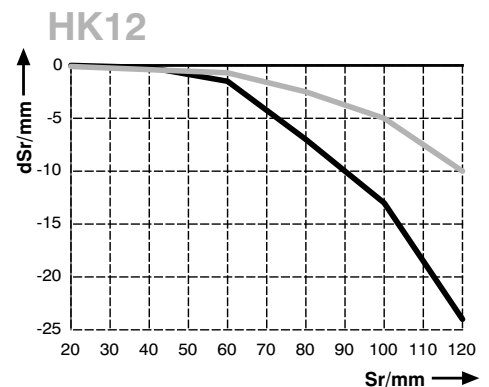

Sr = Switching Distance
 dSr = Switching Distance Change
 — black 6 % remission
 — grey 18 % remission