

Bağlantı Kablosu

M12 × 1; 4 pin'li

S27-10M

Sipariş numarası





Teknik Veriler

Mekanik veriler

Bağlantı 1	Soket, açılı
Bağlantı türü 1	M12 × 1, 4 pin'li
Bağlantı 2	siyirilmiş
Sıkma torku	M12: 0,6 Nm
Kablo uzunluğu	10 m
Kablo çapı	5 mm
Damar kesiti	0,34 mm ²
Gösterge	LED
Koruma sınıfı	IP67
Sıcaklık aralığı	-5...70 °C
Kablo kılıfı materyali	PVC
Kablo damar izolasyonu materyali	PVC
Rakor somun materyali	Pirinç, nikel kaplı
Paketleme birimi	1 adet
Bağlantı şeması no.	S03
Bağlantı tekniği no.	2

● LED'li, açılı

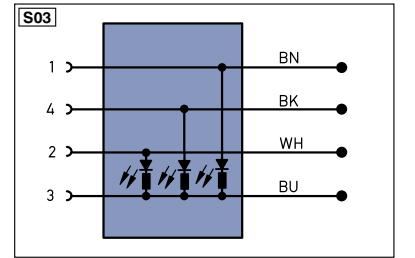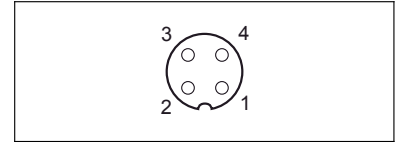

Legend

+	Supply Voltage +	PT	Platinum measuring resistor	EN _A S42	Encoder A/A (TTL)
-	Supply Voltage 0 V	nc	not connected	EN _B S42	Encoder B/B (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENA	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	ENb	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
Ṽ	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY in	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
Z	Time Delay (activation)	AW	Valve Output	Out	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization		Wire Colors according to DIN IEC 757
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	≡	Grounding	OG	Orange
IO-Link	IO-Link	SnR	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx +/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx +/-	Ethernet Send Path	BU	Blue
QSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	La	Emitted Light disengageable	GY	Grey
BL-D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN ₀ S42	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contact Monitoring	GNYE	Green/Yellow